

feel the fab





The 'Fab' series offers a luxurious feel with its unique blend of glossy and matte finishes. The surface is smooth and non-reflective, adding depth to any space.

**design,
strategy
and
innovation.**





turning ideas into materials

we believe that creativity knows no bounds. We are dedicated to providing a platform for turning your design ideas into reality. Our commitment to quality and innovation has made us a trusted name in the industry. With the 'Fab' series, we offer a versatile material that can be customized to fit your vision. Let us help you bring your ideas to life."

inspiring better living

design for BETTER LIFE

we are dedicated to inspiring better living through design. Our ceramic tiles are designed to elevate spaces and create a sense of harmony and beauty. With the 'Fab' series, we offer a range of colors and finishes that are both durable and easy to maintain, ensuring that your space continues to inspire for years to come. Let us help you create a space that inspires better living."





so smooth

Experience the incredibly smooth surface of the 'Fab' series. Its unique texture creates a luxurious feel that adds depth to any space.



ultra technical

The 'Fab' series is designed with the latest technology to resist fire, stains, and markers. The image showcases its durability and reliability.





shape your idea

We offer integrated solutions for flooring and cladding, technical applications, ventilated facades, raised floors, tactile floors.

index

"Transform your space with the durability and easy maintenance of the 'Fab' series. Explore our versatile range of colors today."





Wellness

arrezzo bianco

arrezzo bianco

fab surface

1200x1800mm

9mm thickness

Random : 03





bosco grey


bosco grey

fab surface

1200x1800mm

9mm thickness

Random : 03

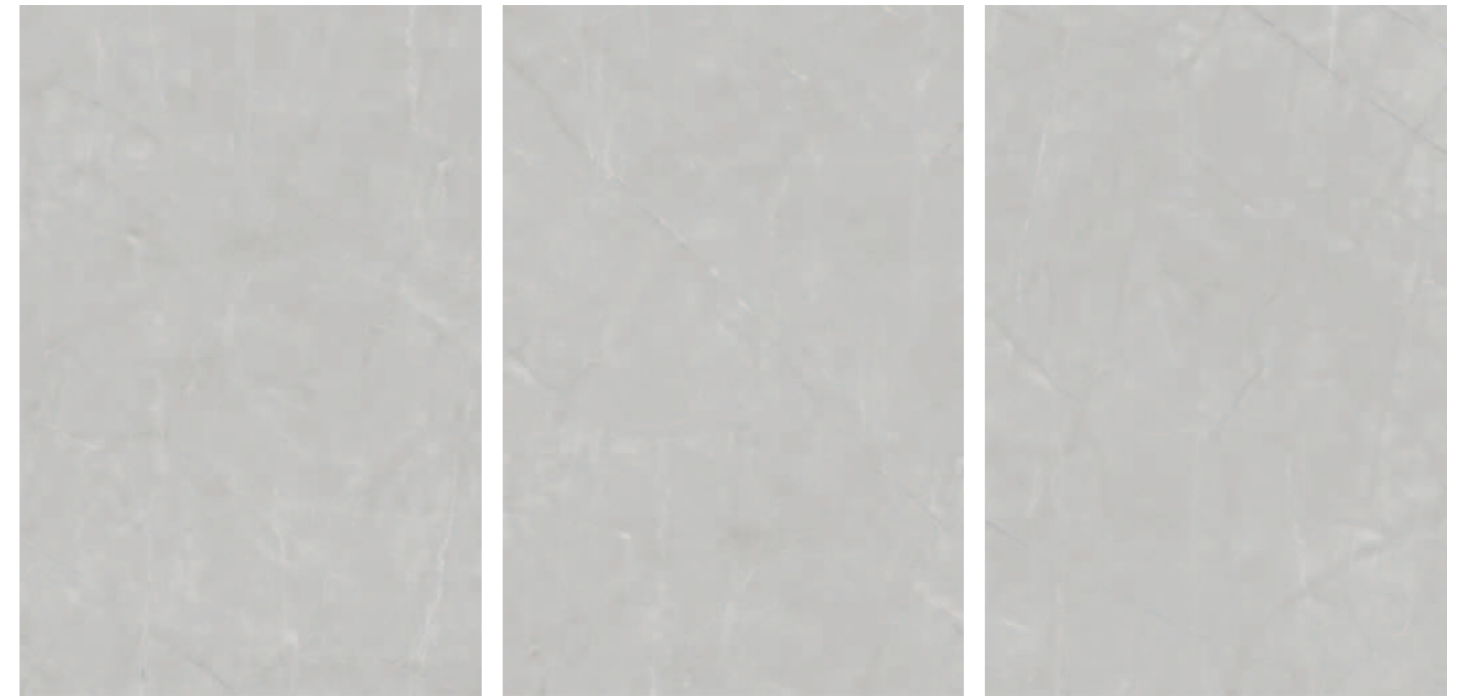



castle grey

castle grey

fab surface

1200x1800mm

9mm thickness

Random : 03





celina natural

celina natural

fab surface

1200x1800mm

9mm thickness

Random : 02





crema elice

crema elice

fab surface

1200x1800mm

9mm thickness

Random : 02





limer grey

limer grey

fab surface

1200x1800mm

9mm thickness

Random : 02





linna grey

linna grey

fab surface

1200x1800mm

9mm thickness

Random : 03





pallisandro white

pallisandro white

fab surface

1200x1800mm

9mm thickness

Random : 03





MEMBER EARLY HOURS
JANUARY 1, 2019
FIGUR



perlato royal

perlato royal

fab surface

1200x1800mm

9mm thickness

Random : 03





sparkle beige

sparkle beige

fab surface

1200x1800mm

9mm thickness

Random : 02





WHITE
wellness
and spa



statuario rome

statuario rome

fab surface

1200x1800mm

9mm thickness

Random : 03



TECHNICAL SPECIFICATION

| TEST DESCRIPTION | TEST METHOD | ISO STANDARD 13006 B1a TILES | VALUE |
|--|--------------------|---|---|
| Length and width | BS EN ISO 10545-2 | ± 0.6% | ± 0.3% |
| Thickness | BS EN ISO 10545-2 | ± 5.0% | ± 3.0% |
| Straightness of sides | BS EN ISO 10545-2 | ± 0.5% | ± 0.3% |
| Rectangularity | BS EN ISO 10545-2 | ± 0.6% | ± 0.3% |
| Surface flatness | BS EN ISO 10545-2 | ± 0.5% | ± 0.3% |
| Water absorption | BS EN ISO 10545-3 | ≤ 0.5% | ≤ 0.05% |
| Breaking strength | BS EN ISO 10545-4 | ≥ 1300N | ≥ 1500N |
| Modulus of rupture | BS EN ISO 10545-4 | ≥ 35 N/mm ² | ≥ 45N/mm ² |
| Resistance to deep abrasion | BS EN ISO 10545-6 | ≤ 175mm ³ | ≤ 150mm ³ |
| Linear thermal expansion | BS EN ISO 10545-8 | ≤ 9 x 10 ⁻⁶ °C ⁻¹ | ≤ 7 x 10 ⁻⁶ °C ⁻¹ |
| Thermal shock resistance | BS EN ISO 10545-9 | No visible defect | No visible defect |
| Frost resistance | BS EN ISO 10545-12 | Frost proof | Frost proof |
| Resistance to chemicals | BS EN ISO 10545-13 | No visible effect | No visible effect |
| Resistance to stain | BS EN ISO 10545-14 | Manufacturer to state class | Stains removed Min. Class 2 |
| Colour resistance | BS EN ISO 10545-16 | No damage | No damage |
| Colour resistance to UV Light | DIN 51094 | No change in color | No change in color |
| Scratch hardness(MOH's Scale) | EN 101 | ≥ 6 MOHS | ≥ 7 MOHS |
| Surface quality | BS EN ISO 10545-2 | Min. 95% | No visible defect |
| Skid resistance (friction co-efficient) | BS EN ISO 10545-17 | > 0.4 | >0.4 |
| Moisture Expansion | - | Nil | Nil |



PACKING DEATILS

| Size | Pcs / Box | Weight (Approx) | Thickness (Approx) | SQ. / Box |
|-----------|-----------|-----------------|--------------------|-----------|
| 1200x1800 | 2 | 90 kg | 9mm | 46.50 |